

1.1 kg

13 x 10 x 6 cm

2 meters/sec

300 ft max



3700

Pocket-sized technology that saves lives, time and money.

DEUS® 3700
Industrial Escape & Rescue System

Whether you work on 20 ft. high platforms or 300 ft. scaffolding, the DEUS 3700 is your easy-to-use and reliable tool for vertical rescue, travel restraint and more. ANSI-certified, it is lightweight and compact so you carry it with you all the time, enabling workers to rescue themselves and others when things go wrong. It features quadruple-redundant brakes and speed limiting technology to guard against free fall. Plus, rope replacement is simple, making it highly flexible for various applications. The DEUS 3700 is available in complete kits to support a variety of uses.

actual size





A compact, reliable, ultra-safe **does-it-all** rescue system.

Hands Free

Operates fully hands free, stop or go, while protecting you from free fall.

Extra, Extra, Extra, Extra Safe

Four independent brakes provide extra safety, versatility and control: an always-active centrifugal brake, a control knob-activated drum brake, a hands-free self-adjusting figure-8, and a manual rope-tailing brake for precise control.

Simple Operation


The oversized control knob is all you need for complete control, even with heavy gloves. Stop or go and change speed any time during descent.

Lightweight & Portable

Pocket-sized and just 1.1 kg (plus rope).

Built for Performance

Features a rock-solid case and professional grade construction.

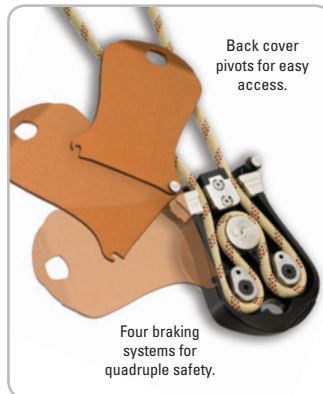

Replaceable Rope

Change out rope in seconds for training or work.

Your All-in-One Rescue System

Use the DEUS 3700 for escape, rapid sequential rescue, vertical positioning and travel restraint. Add 2-person assisted rescue and confined-space rescues with advanced training.

Uses DEUS Rescue Rope

Certified for use only with 7.5 mm DEUS ropes. NFPA-certified and fire-, cut-, abrasion-, chemical- and UV-resistant.

Proven Reliable

Certified to meet ANSI and NFPA standards.

Only from DEUS Rescue

DEUS Rescue delivers innovative professional rescue solutions worldwide. For more information, visit www.DEUSrescue.com.



Available as part of complete Escape & Rescue Kits.

SPECIFICATIONS

Model No.: DEUS 3700

Item: Industrial Escape & Rescue System

Weight: 1.1 kg (plus rope)

Dimensions: 13 x 10 x 6 cm (5.3 x 3.8 x 2.2 in)

Descent Rate: 2m/sec max; see chart

Load Rating: Up to 140 kg (310 lb)

Operation: Hands-free or manual

Construction: Aluminum, stainless steel, titanium and brass


Standards: ANSI Z359 and NFPA 1983 (06 ED) "E"

Available 3700 Kits: Industrial Escape Kit
Industrial Escape & Rescue Kit

Other kits and accessories also available

DEUS 3700 Maximum Hands-Free Descent Rate

2 meters/second regardless of load.

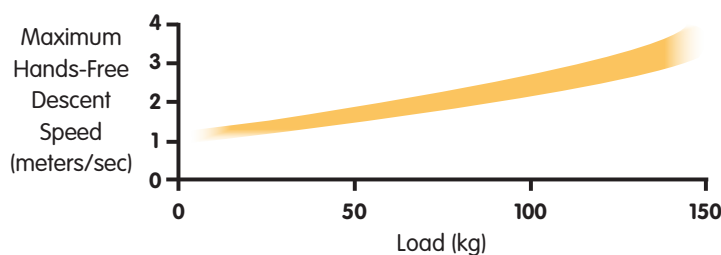

DEUS • RESCUE